

G45-03

8W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	45x82 mm
MATERIAL	Plastic



G45-03

6W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	45x82 mm
MATERIAL	Plastic



C37

6W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	37x125 mm
MATERIAL	Plastic



C37

8W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	37x125 mm
MATERIAL	Plastic



G45-08

6W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	46.5x88.5 mm
MATERIAL	Plastic



G45-08

8W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	46.5x88.5 mm
MATERIAL	Plastic





A65-09
13.5W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	65x122 mm
MATERIAL	Plastic



A70-09
15W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	70x137,5 mm
MATERIAL	Plastic



A60-08
10W



VOLTAGE	AC:175-256V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	60x110 mm
MATERIAL	Plastic



A60-09
10W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	60x110 mm
MATERIAL	Plastic



A80-09

16.5W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	80x152,5 mm
MATERIAL	Plastic



A95-09

20W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	95x188 mm
MATERIAL	Plastic





A110-01

26W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	110x210 mm
MATERIAL	Plastic



G80-02

12W



VOLTAGE	AC175-265V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	30.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	80x120 mm
MATERIAL	Plastic



G95-02

18W



VOLTAGE	AC:175-265V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	95x140 mm
MATERIAL	Plastic



G125-09

21W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	125x172,5 mm
MATERIAL	Plastic

E27-U-10W

10W

VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø49x138 mm
MATERIAL	Aluminum+PPT+glass





E27-U-12W

10W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K
DIMENSION	Ø 42x138 mm
MATERIAL	Aluminum+PPT+glass



E27-U-14W

14W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø 42x138 mm
MATERIAL	Aluminum+PPT+glass



E27-U-16W

16W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø 42x152mm
MATERIAL	Aluminum+PPT+glass



E27-U-18W

18W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø48x164 mm
MATERIAL	Aluminum+PPT+glass



E27-U-20W

20W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500
DIMENSION	Ø 48x176 mm
MATERIAL	Aluminum+PPT+glass



E27-S-11W

11W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø 42x126 mm
MATERIAL	Aluminum+PPT+glass



E27-U-13W

13W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø42x130mm
MATERIAL	Aluminum+PPT+glass



E27-S-16W

16W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø47x135 mm
MATERIAL	Aluminum+PPT+glass



E27-S-18W

18W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø 47x144 mm
MATERIAL	Aluminum+PPT+glass



E27-S-20W

20W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø 59x164 mm
MATERIAL	Aluminum+PPT+glass



E27-S-22W

22W



VOLTAGE	AC:230V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	Ø59x169mm
MATERIAL	Aluminum+PPT+glass

LED SPOT LIGHTS



A60-T8
8W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	60x105 mm
MATERIAL	Plastic



A60-T4
4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	60x105 mm
MATERIAL	Plastic





C35-T

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	35x97 mm
MATERIAL	Plastic



C35A-TN

8W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	10.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	35x118 mm
MATERIAL	Plastic



G45A-TR

4W



INPUT VOLTAGE: AC220-240V
POWER: 4W
DIMENSION: 45X78mm
LIGHT BEAM: 360°
DURATION: 10.000 ore
WORKING CONDITION: -20°+45°
MATERIAL: Vetro
DIMMER: NO



G45A-TV

4W



INPUT VOLTAGE: AC220-240V
POWER: 4W
DIMENSION: 45X78mm
LIGHT BEAM: 360°
DURATION: 10.000 ore
WORKING CONDITION: -20°+45°
MATERIAL: Vetro
DIMMER: NO



G45A-TB

4W



INPUT VOLTAGE: AC220-240V
POWER: 4W
DIMENSION: 45X78mm
LIGHT BEAM: 360°
DURATION: 10.000 ore
WORKING CONDITION: -20°+45°
MATERIAL: Vetro
DIMMER: NO



G125-T12

12W



Voltaggio	AC:220V
Frequenza	50/60Hz
CRI	> 80
PF	> 0.5
Durata	20.000 h
Temp.Colore	3000K - 4000K - 6500K
Dimensione	125x175 mm
Materiale	Plastic



G125-O12

8W



Voltaggio	AC:175-256V
Frequenza	50/60Hz
CRI	> 80
PF	> 0.5
Durata	10.000 h
Temp.Colore	3000K - 4000K - 6500K
Dimensione	45x82 mm
Materiale	Plastic



T64-TC

8W



Voltaggio	AC:220V
Frequenza	50/60Hz
CRI	> 80
PF	> 0.5
Durata	10.000 h
Temp.Colore	3000K - 4000K - 6500K
Dimensione	64x142 mm
Materiale	Plastic



CU-OC

4W



Voltaggio	AC:220V
Frequenza	50/60Hz
CRI	> 80
PF	> 0.5
Durata	20.000 h
Temp.Colore	3000K - 4000K - 6500K
Dimensione	125x165 mm
Materiale	Plastic




TD-OC

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	125x175 mm
MATERIAL	Plastic

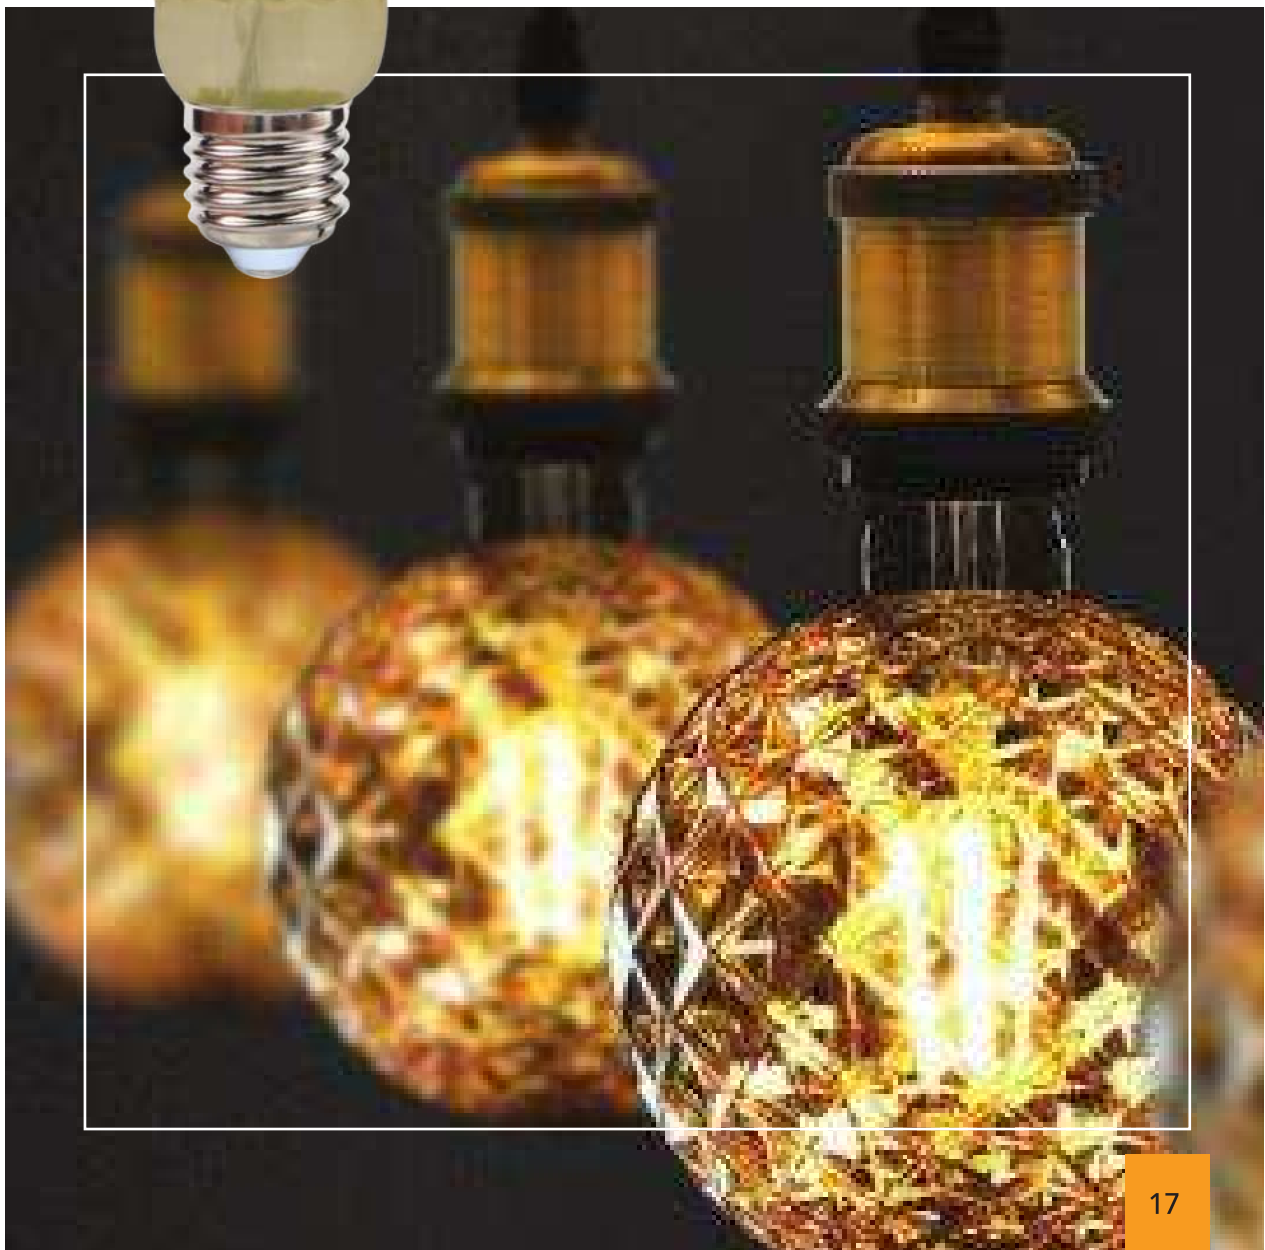



ST-OC

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	127x167 mm
MATERIAL	Plastic



TRI-OC

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	110x165 mm
MATERIAL	Plastic



DM-OC

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	110x140 mm
MATERIAL	Plastic



OV-OC

4W



VOLTAGE	AC:220V
FREQUENCY	50/60Hz
CRI	> 80
PF	> 0.5
DURATION	20.000 h
LIGHT COLOR	3000K - 4000K - 6500K
DIMENSION	95x125 mm
MATERIAL	Plastic



E27-M 1,5mt

GENERAL INFORMATION

MATERIAL: Cable 2x0.5mm+hemp rope+metal
MAX LAMP: 60W
ATTACK: E27
WEIGHT: 0.412Kg
CABLE COLORS:
N: black or blue wire
L: brown or red thread
T: yellow green



E27-M2 2mt

GENERAL INFORMATION

MATERIAL: Cable 2x0.5mm+hemp rope+metal
MAX LAMP: 60W
ATTACK: E27
WEIGHT: 0.656Kg
CABLE COLORS:
N: black or blue wire
L: brown or red thread
T: yellow green





E27-2M-B

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: White
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal



E27-2M-A

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: Silver
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal



E27-2M-D

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: Bronze
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal



E27-2M-V

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: Green
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal



E27-2M-N

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: Black
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal

E27-2M-O

2mt

GENERAL INFORMATION

VOLTAGE: 110-240V (50Hz)
MATERIAL: metal+paint+aluminum
COLOR: Gold
MAX LAMP: 60W
ATTACK: E27
WEIGHT:
IP: IP20
USE: Internal



ST-LV-N



ST-LV-B



11mt

GENERAL INFORMATION

VOLTAGE: 100-240V AC

CABLE: HO5W-F 2x0,75 mm

DISTANCE: 1mt

TOTAL LAMP HOLDER: 10


MATERIAL: Copper cable+pvc+ BFR

JACK: Shulko

IP: IP44

E27 bulb is not included in the package

Connect up to 8 string leads (80mt) for a total of 600W through watertight connectors.

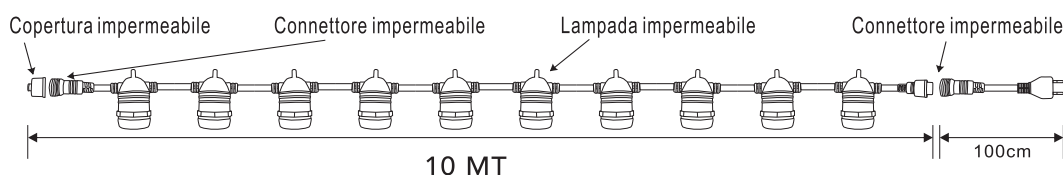

ST-AP-N



ST-AP-B



11mt

GENERAL INFORMATION

VOLTAGE: 100-240V AC

CABLE: HO5W-F 2x0,75 mm

DISTANCE: 1mt

TOTAL LAMP HOLDER: 10

MATERIAL: Copper cable+pvc+ BFR

JACK: Shulko

IP: IP44

E27 bulb is not included in the package

Connect up to 8 string leads (80mt) for a total of 600W through watertight connectors.

